

V15

15" XGA Industrial Monitor with Resistive Touchscreen, Direct VGA



Features

- * 15" XGA TFT LCD
- * Direct VGA video input interface
- * Flat-sealed front panel
- * Resistive Touchscreen (optional)
- * RS232 or USB interface for touchscreen function
- * Support industrial 10 ~ 30 Vdc power input (optional)
- * Easy wall and VESA arm mounting system
- * Front panel is IP65 compliant

Specifications

General

- **Button Controls** OSD control pad on rear side
- **Certification** CE
- **Enclosure** Front panel: Aluminium and flat-sealed
Rear cover: Anti-rust coating
- **Mounting** Panel, Wall, VESA arm or 15" rackmount
- **USB** Front USB access for extension (optional)
- **Video Port** VGA

LCD Display

- **Size /Type** 15" TFT Colour LCD
- **Max. Resolution** 1024 x 768
- **Max. Colors** 16.2 M
- **Viewing Angle** 160°
- **Luminance** 400 cd/m²
- **Back Light** CFL

Power Supply

- **Power Requirement:** max. 1.2A a 12V
- **Power Input:** 2.5 Jack
- **Input Voltage:**
 - ▶ 12 Vdc
 - ▶ or 100 ~ 240 Vac (optional)
 - ▶ or 10 ~ 30 Vdc (optional)

Touchscreen (optional)

- **Controller:** EETI E-GALAX
- **Type:** 5-wire Resistive
- **Interface:** RS-232 or USB
- **Power Consumption:** +5 V @ 100 mA

Environmental

- **Operating Temp.:** 0 to 50° C
- **Storage Temp.:** -20 to 60° C
- **Storage Humidity:** 10 to 90 % non condensing
- **Vibration:** 5 to 500 Hz, 1 Grms
- **Front Panel protection:** meet NEMA 4 & IP65

Mechanical


- **Construction:** ▶ **Back:** Heavy-duty galvanized metal chassis
- ▶ **Front:** Non-scratch black paint on aluminium frame
- **Wall fixing:** by 4 clamps
- **Weight:** 6.3 Kg
- **Dimension (W x H x D):** 416 x 319 x 42 mm



Tél: 09-62-55-62-88
Email: keyproline@keyproline.com

Fax: 05-63-03-54-41
Internet: www.keyproline.com

☛ V15 Dimension Diagram ...

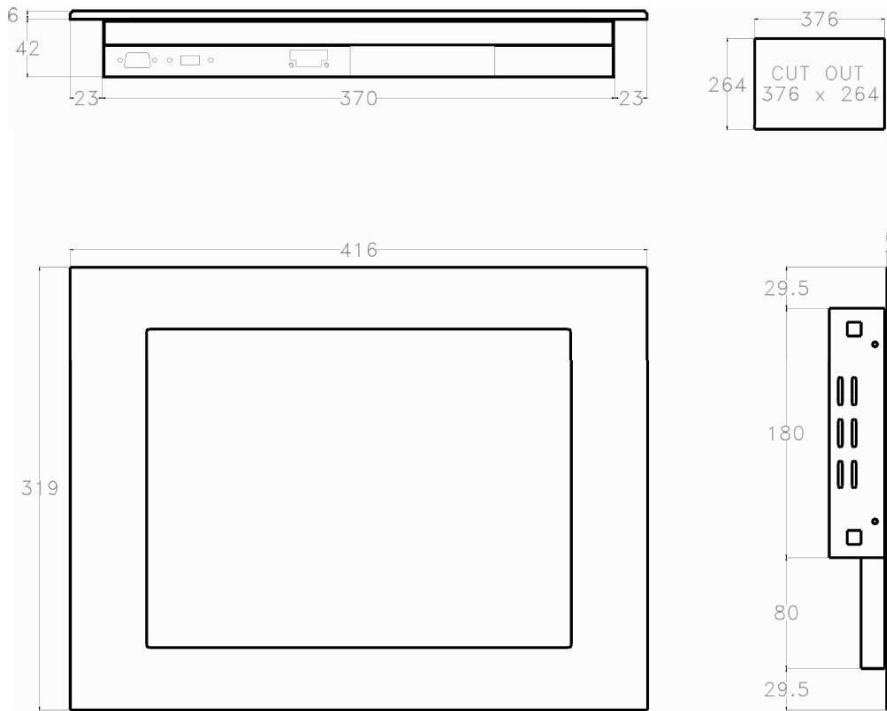

15" Rack mount version = 7 UR

☛ Ordering Information ...

V15 - XX - X - XX

| | | |
|----|---|----|
| 00 | P | DC |
| TS | W | DE |
| TU | R | AC |

DC = 12 Vdc supply
 DE = 10 - 30 Vdc supply
 AC = 100 - 240 Vac supply

P = Panel mount (without frame)
 W = Wall Mount (with frame)
 R = 15" Rack Mount

00 = Without Touchscreen
 TS = RS232 Interface Touchscreen
 TU = USB Interface Touchscreen

☛ Accessories ...

VA-T
VESA ARM for desk mounting

VA-W
VESA ARM for wall mounting

☛ Spare parts ...

DE PS
DE power supply (10 - 30 Vdc)

AC PS
AC power supply (100 - 240 Vac)



Tél: 09-62-55-62-88
Email: keyproline@keyproline.com

Fax: 05-63-03-54-41
Internet: www.keyproline.com